

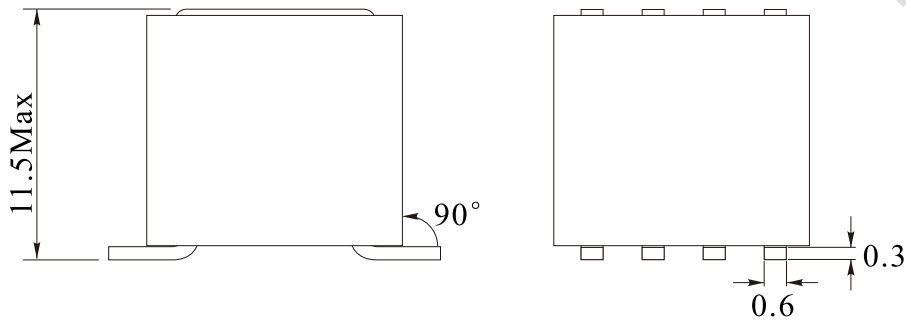


1. PHYSICAL CHARACTERISTICS(mm)

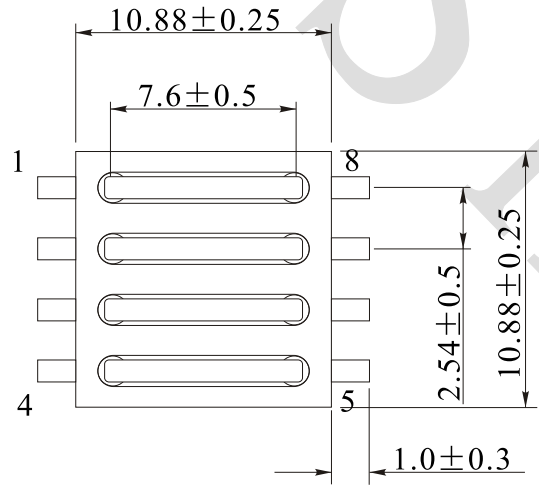

Remark : 1.Pin Angle is 90°
2.Ferrite bead bottom is flat

2.ELECTRONICAL SCHEMATIC

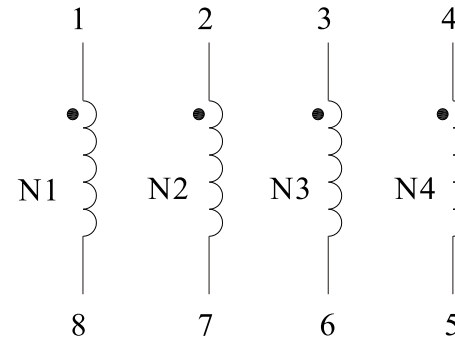

3.ELECTRONICAL SPECIFICATIONS

Impedance: 115 Ω Min@25MHz
170 Ω Min@100MHz

DCR: 15mΩ Max

Rated voltage: 50V Max

Max. Current: 6.0A

Test Instrument:
/Z/: HP4291A
RDC: HM2540

NOTES:
Temp 20°C 48%RH
RoHS Compliant

NAME:	SMD Ferrite bead array		
CUSTOMER P/N:		DATE:	2014-06-03
SHINHOM P/N:	SMB1010-4W	REV: A1	PAGE
DRAWN	CHECKED BY	APPROVE BY	